


NOTES:

1. PAVERS TO BE MUTUAL MATERIALS HOLLAND SERIES (SIZE $2\frac{3}{8}" \times 7\frac{7}{8}" \times 3\frac{1}{2}"$), STANDARD RED OR APPROVED EQUAL. PAVER TO BE SAND SET AND COATED WITH SAND JOINT STABILIZER ('PAVER KARE' OR APPROVED EQUAL).
2. A STAMPED CONCRETE PATTERN MAY BE SUBSTITUTED FOR PAVERS WITH APPROVAL BY THE CITY. STAMP PATTERN WOULD BE A CUSTOM PATTERN AS THERE ARE NO EQUIVALENT AVAILABLE PATTERNS. CONCRETE STAMP COLOR TO BE APPROVED BY THE CITY.
3. DIAGONAL SCORING TO BE AT 45 DEG TO CENTER LINE OF ROAD TYP.

2' BRICK BANDING AND SIDEWALK SCORING DETAIL

NTS

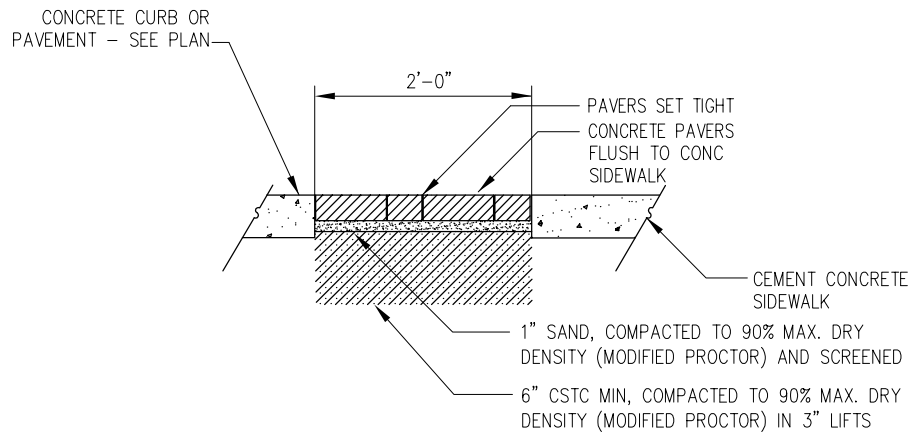

PAVER BAND - SECTION

APPROVED: WILLIAM J. CAMPBELL

REV. DATE: JULY 1, 2007



STANDARD DETAILS

2' BRICK BANDING AND SIDEWALK SCORING DETAIL

FILE SD475 DRAWING NO. **475**